

Stock Oilers


Keep Your Material Running Smoothly!

Slim Style Stock Oiler

Features and Benefits:


- Oil can be supplied evenly and thinly to the upper and lower surfaces of the material prolonging the life of your tools.
- This machine is equipped with two rollers, upper and lower. Oil can be precisely positioned on each part of your tool as required.
- A filter screen is located in the oil supply reservoir allowing for re-use.
- Both the upper and lower rollers are made of high quality and density felt.
- Installation in two minutes!

SLIM STYLE STOCK OILER				
Model	Max Material Width	Material Thickness	Machine Thickness	Machine Height
DCT 65	2 1/2"	.004-.125	1"	4"
DCT 80	3"	.004-.125	1"	4"
DCT 100	4"	.004-.125	1"	4"
DCT 150	6"	.004-.125	1"	4"
DCT 200	8"	.004-.125	1"	4"
DCT 250	10"	.004-.125	1"	4"
DCT 300	11 3/4"	.004-.125	1"	4"
DCT 350	13 3/4"	.004-.125	1"	4"
DCT 400	15 3/4"	.004-.125	1"	4"
DCT 450	17 3/4"	.004-.200	1 1/2"	4"
DCT 500	19 3/4"	.004-.200	1 3/4"	5 1/2"
DCT 550	21 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 600	23 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 650	25 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 700	27 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 750	29 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 800	31 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 850	33 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 900	35 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 950	37 1/2"	.004-.200	1 3/4"	5 1/2"
DCT 1000	39 1/2"	.004-.200	1 3/4"	5 1/2"

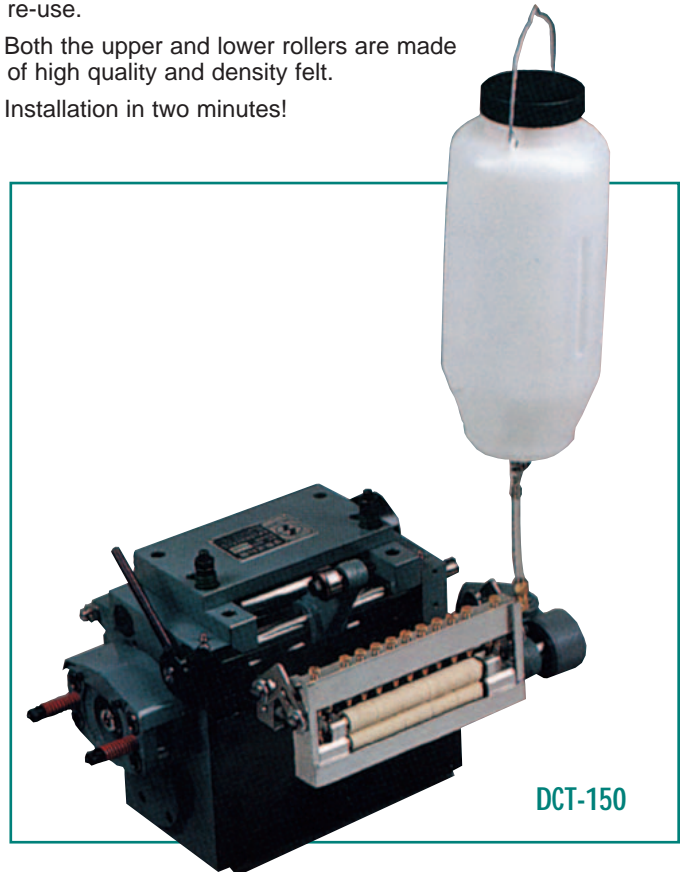

DCT-150

Can be installed on all Air Feeds and Roll Feeds.

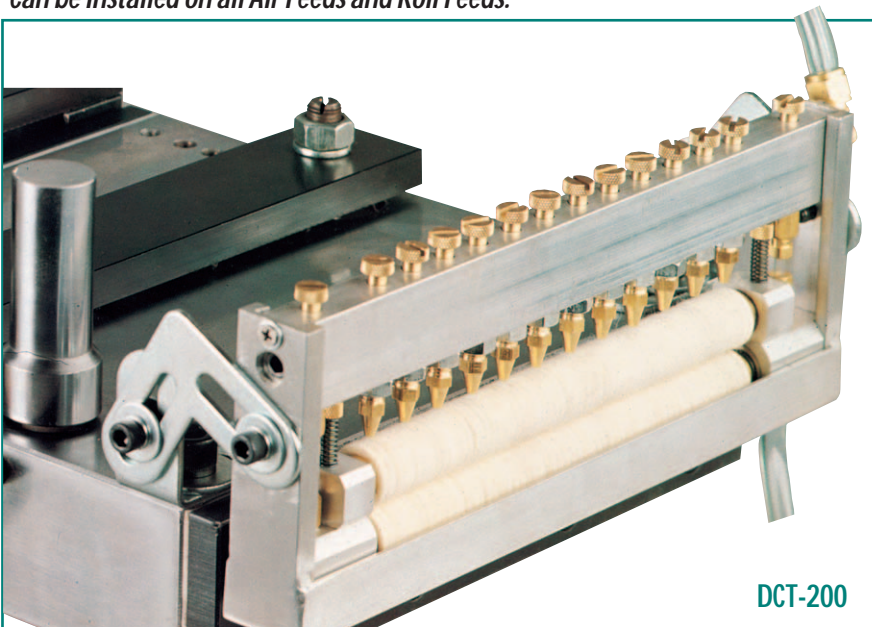

DCT-200

SLIM STYLE STOCK OILER		
Model	Max Material Width	Material Thickness
DAT 65	2 1/2"	.004-.240
DAT 80	3"	.004-.240
DAT 100	4"	.004-.240
DAT 150	6"	.004-.240
DAT 200	8"	.004-.240
DAT 250	10"	.004-.240
DAT 300	11 3/4"	.004-.240
DAT 400	15 3/4"	.004-.240
DAT 500	19 3/4"	.004-.240
DAT 600	23 1/2"	.004-.240
DAT 700	27 1/2"	.004-.240
DAT 800	31 1/2"	.004-.240
DAT 1000	39 1/2"	.004-.240

Can be installed on all Air Feeds and Roll Feeds.